

15W AC-DC Industrial On Board Type Power Module


IOB-15 series

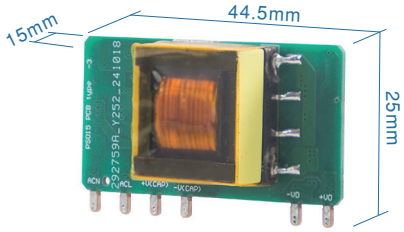

IOB-15-xxA

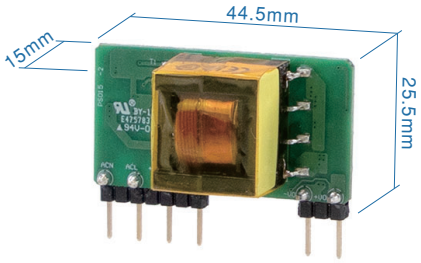

IOB-15-xxB

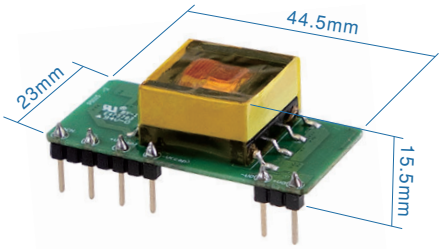

IOB-15-xxC

Automate Industrial Security Network Telecom

Features

- Assemble on the main PCB of the system
- 1.75"x0.86"compact size
- 85~305Vac input (277Vac available)
- No load power consumption <0.25W
- -40~85℃ wide operating temperature
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- Safety Class Ⅱ
- 3 years warranty

Applications

- Industrial electrical equipment
- Mechanical equipment
- Factory automation equipment
- Hand-held electronic device
- Smart home
- Industrial control

GTIN CODE

MW Search: https://www.meanwell.com/serviceGTIN.aspx

Description

The IOB-15 series is a compact and reliable AC-DC open frame power module featuring high efficiency and low power consumption. It is particularly well-suited for space-constrained applications with stringent energy efficiency requirements. The product features a compact design and supports universal input voltage range of 85~305Vac. With ultra-low standby power consumption <0.25W, it is energy efficiency and eco-friendly. It also offers an ultra-wide operating temperature range of -40℃~+85℃ as well as complete protection functions to ensure safe and reliable operation. These features make the product suitable for applications with strict space constraints, such as industrial automation, power metering, and smart devices.

Model Encoding

IOB - 15 - 05 A

- A: Edge Connector
  B: Vertical
  C: Horizontal
- Output voltage (3.3/5/9/12/15/24Vdc)
- Rated wattage
- Series name

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000


SPECIFICATION	IOB-15-03□	IOB-15-05□	IOB-15-09□	IOB-15-12□	IOB-15-15□	IOB-15-24□
	□=A,B,C					
OUTPUT						
DC VOLTAGE	3.3V	5V	9V	12V	15V	24V
RATED CURRENT	3A	2.8A	1.67A	1.25A	1A	0.625A
CURRENT RANGE	0 ~ 3A	0 ~ 2.8A	0 ~ 1.67A	0 ~ 1.25A	0 ~ 1A	0 ~ 0.625A
RATED POWER	9.9W	14W	15W	15W	15W	15W
RIPPLE & NOISE (max.) Note.2	150mV					
INITIAL SET POINT ACCURACY	±3% for 3.3Vdc output, ±2% for other output					
LINE REGULATION	±0.5%					
LOAD REGULATION	±2% for 3.3Vdc output, ±1.5% for 5Vdc output, ±1% for other output					
CAPACITOR LOAD (Max.)	20000μF	15000μF	5000μF	4000μF	2000μF	1000μF
INPUT						
VOLTAGE RANGE	85 ~ 305Vac 100 ~ 430Vdc					
FREQUENCY RANGE	47 ~ 63Hz					
EFFICIENCY (Typ.)	75%	77%	82%	82%	84%	85%
AC CURRENT (Typ.)	0.4A/115Vac 0.25A/230Vac					
INRUSH CURRENT (Typ.)	18A/115Vac 35A/230Vac					
NO LOAD POWER CONSUMPTION	<0.25W					
PROTECTION						
SHORT CIRCUIT	Protection type : Continuous, automatic recovery, Hiccup mode					
OVERLOAD	>110% rated output power					
	Protection type : Hiccup mode, recovers automatically after fault condition is removed					
OVER VOLTAGE (Max.)	9Vdc	9Vdc	12Vdc	16Vdc	20Vdc	30Vdc
	Protection type : Output voltage clamp					
ENVIRONMENT						
COOLING	Free-air convection					
WORKING TEMP. Note.4	-40 ~ +85℃ (Refer to "Derating Curve")					
WORKING HUMIDITY	20% ~ 90% RH non-condensing					
STORAGE TEMP., HUMIDITY	-40 ~ +105℃, 10 ~ 95% RH non-condensing					
TEMP. COEFFICIENT	±0.15% / ℃ max. (0 ~ 85℃)					
VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes					
SAFETY & EMC (Note.5)						
SAFETY STANDARDS	LVD IEC62368-1 approved					
WITHSTAND VOLTAGE	I/P-O/P:3KVac leakage current <5mA					
ISOLATION RESISTANCE	I/P-O/P:1000M Ohms / 500Vdc / 25℃/ 70% RH					
EMC EMISSION	**Parameter**		**Standard**		**Test Level / Note**	
	Conducted		BS EN/EN55032(CISPR32)		Class A without external components Class B with external components	
	Radiated		BS EN/EN55032(CISPR32)			
EMC IMMUNITY	**Parameter**		**Standard**		**Test Level / Note**	
	ESD		BS EN/EN61000-4-2		Level 3, ±6KV contact criteria B	
	Radiated Susceptibility		BS EN/EN61000-4-3		Level 3, 10m/V contact criteria A	
	EFT/Bursts		BS EN/EN61000-4-4		Level 2, ±2KV	
	Surge		BS EN/EN61000-4-5		Level 2, ±1KV Line-Line	
	Conducted		BS EN/EN61000-4-6		Level 2, 10Vrms Criteria A	
	Voltage Dips and Interruptions		BS EN/EN61000-4-11		0%, 70% perf. Criteria B	
OTHERS						
MTBF (Typ.)	>10000Khrs MIL-HDBK-217F(25℃)					
DIMENSION (L*W*H)	**A Type : 44.5*25*15mm (1.751*0.984*0.59 inch) ; B Type : 44.5*25.5*15mm (1.751*1.003*0.59 inch)** **C Type : 44.5*23*15.5mm (1.751*0.905*0.61 inch)**					
PACKING	A,B Type :11.2g ; 49pcs/per Tray, 637pcs/13 Tray/per carton C Type :11.2g ; 56pcs/per Tray, 448pcs/8 Tray/per carton					

NOTE


1.All parameters NOT specially mentioned are measured at 230Vac input, rated load and 25℃ of ambient temperature.
2.Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μF & 47μF parallel capacitor.
3.Length of set up time is measured at first cold start. Turning ON/OFF the power supply may lead to increase of the set up time.
4.When starting at a low temperature of -40℃, the output capacitor needs to be equipped with a solid capacitor to meet the load reduction curve requirements.
5.The final equipment must be re-confirm that it still meet EMC directives. For guidance on how to perform these EMC tests, please refer to “EMI testing of component power supplies.”(as available on http://www.meanwell.com)
※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000


■ Derating Curve

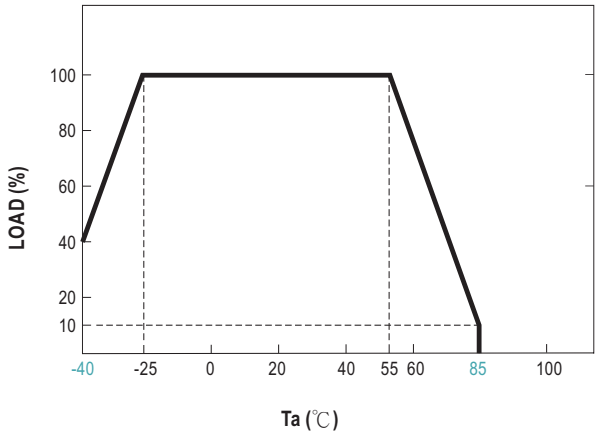

■ Output Derating VS Input Voltage

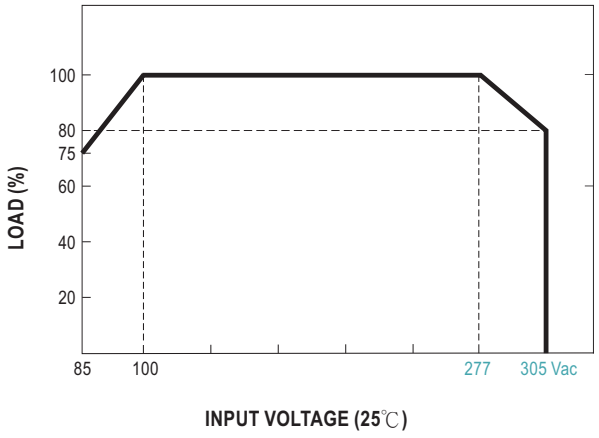

■ Additional Circuit Design Reference

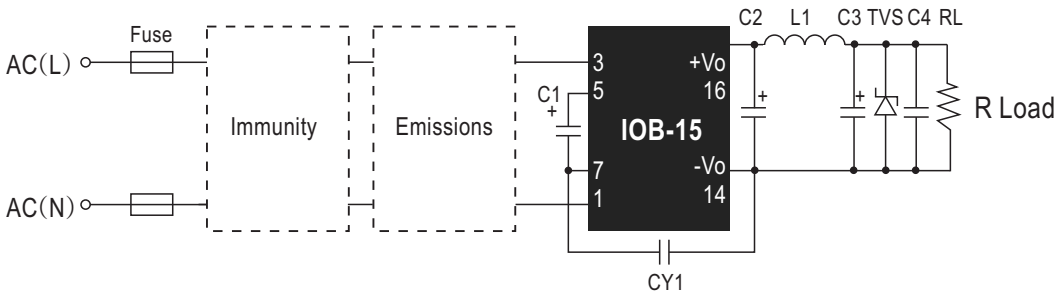

IOB-15 Series additional component selection guide (no EMC devices)								
Model No.	FUSE (required)	C1 (required)	C2[2] (required)	L1 (required)	C3[2] (required)	C4	CY1 (required)	TVS
IOB-15-3.3□	1A/300V	33uF/450V	470uF/16V (Polymer capacitor)	2.2uH (Max, 22mΩ)	220uF/16V	0.1uF/50V	2.2nF/400Vac	SMBJ7.0A
IOB-15-05 □								SMBJ7.0A
IOB-15-09 □								SMBJ12A
IOB-15-12 □								SMBJ20A
IOB-15-15 □			680uF/25V		220uF/35V			SMBJ20A
IOB-15-24 □			470uF/35V					SMBJ30A





Note: 1. C2,C3 is recommended to be a high frequency electrolytic capacitor with low ESR.

2. Recommended to use a polymer capacitor (at -40℃) with at least 20% margin on voltage rating.


LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

■ Additional EMC Suggestion Circuit

IOB-15 Series Environmental and EMC selection guide					
Recommended circuit	Typical industry	Input voltage range	Environment temperature	Emissions	Immunity
1	General purpose	85~305Vac	-40°C to 85°C	Class A	Class III
2	Smart home, home appliances, intelligent building, intelligent agriculture		-25° Cto 55°C	Class B	Class III
3	Indoor industrial		-25°C to 55°C	Class B	Class IV
4	Outdoor, video monitoring, charging point, communications, security		-40°C to 85°C	Class A	Class IV

Immunity design circuits reference		Emissions design circuits reference	
Class III	Class IV	Class A	Class B
			

1.Circuit 1 - Basic - Application

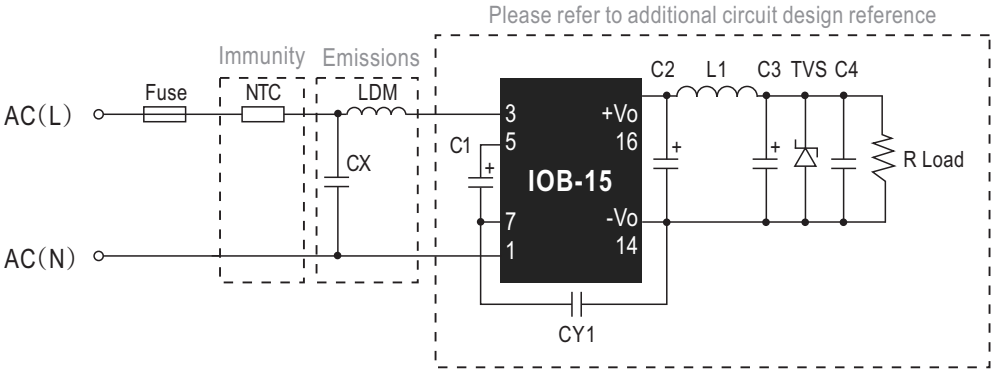


Ambient temperature range	Immunity Class	Emissions Class
-40° C ~85° C	Class III	Class A

Component	Recommended value
NTC	10D-10
LDM	1.2mH (min: 0.4A, max: 4Ω)
CX	0.1uF/310Vac
Fuse(required)	1A/300V,slow blow

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

2.Circuit 2 - Indoor Civil / Indoor General Environment

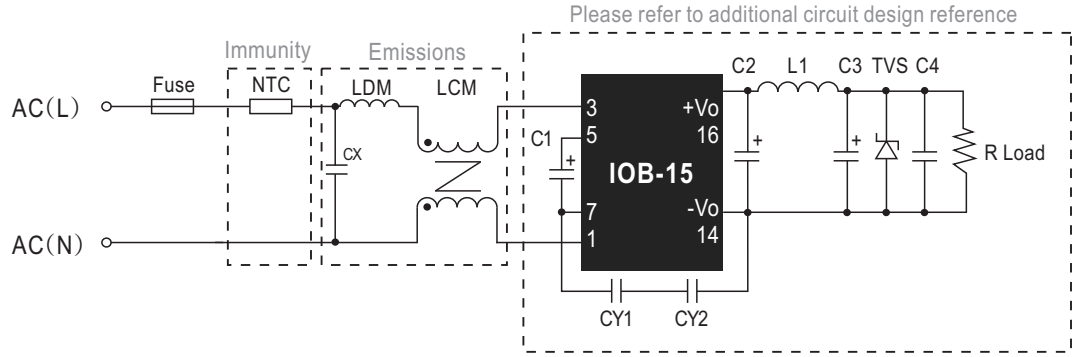


Ambient temperature range	Immunity Class	Emissions Class
-25°C ~ 55°C	Class III	Class B

Component	Recommended value
NTC	10D-10
CY1 (CY2)	2.2nF/400Vac
LCM	10mH (min: 0.4A,max:600mΩ)
LDM	0.33mH (min: 0.4A,max:1Ω)
CX	0.22uF/310Vac
Fuse (required)	1A/300V, slow blow

Note: When designing applications for household use (e.g. Smart Home or Home Appliance application), two Y-Caps (CY1 & CY2 valued at 2.2nF/400Vac each) are required in series to satisfy 60335 household safety requirements. Non-household applications can use one Y-Cap (CY1 valued at 2.2nF/400Vac)

3.Circuit 3 - Indoor General Environment

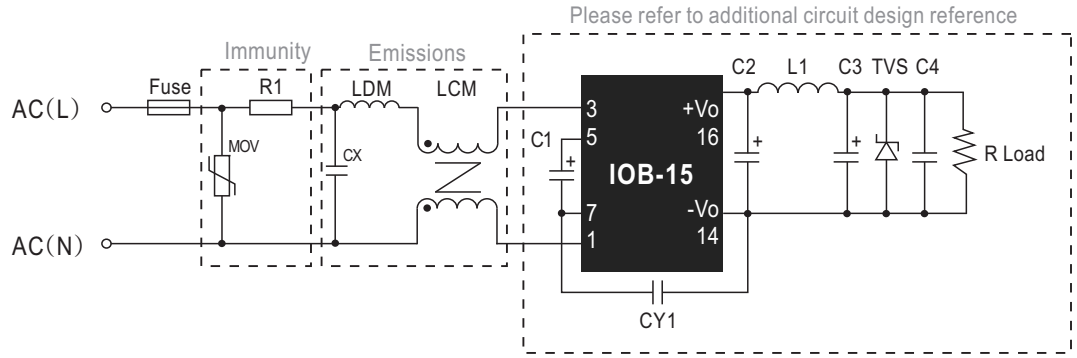


Ambient temperature range	Immunity Class	Emissions Class
-25°C ~ 55°C	Class IV	Class B

Component	Recommended value
MOV	S14K350
CY1	2.2nF/400Vac
CX	0.22uF/310Vac
LCM	10mH (min: 0.4A,max:600mΩ)
LDM	0.33mH (min: 0.4A,max:1Ω)
R1(wire-wound resistor, required)	12Ω/3W
Fuse (required)	2A/300V, slow blow

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

4.Circuit 4 - Outdoor General Environment

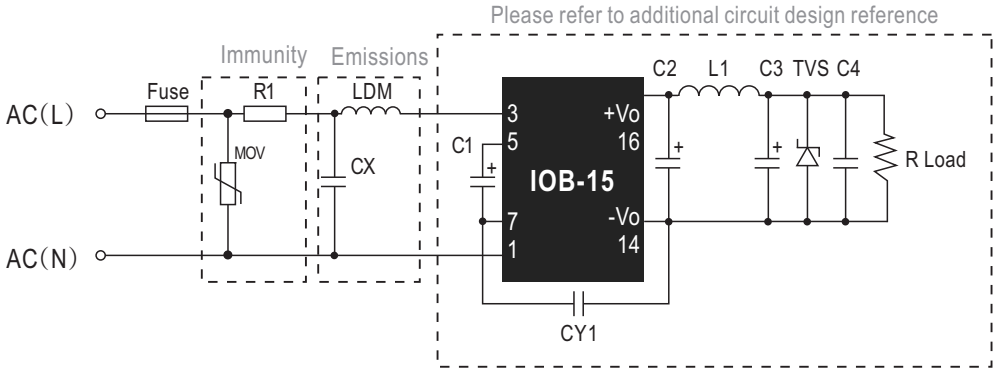

Ambient temperature range	Immunity Class	Emissions Class
-40° C ~ 85° C	Class IV	Class A

Component	Recommended value
MOV	D14K350
LDM	1.2mH (min: 0.4A, max: 4Ω)
CX	0.1uF/310Vac
R1 (wire-wound resistor, required)	12Ω/3W
FUSE (required)	2A/300V, slow-blow


Note: R1 must be a wire-wound resistor; do not use a chip or carbon film resistor.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000


■ Mechanical Specification

- All dimensions in mm
- Pin section tolerance: ±0.3mm
- General tolerance: ±0.5mm

IOB-15-xxA (Edge Connector Type)

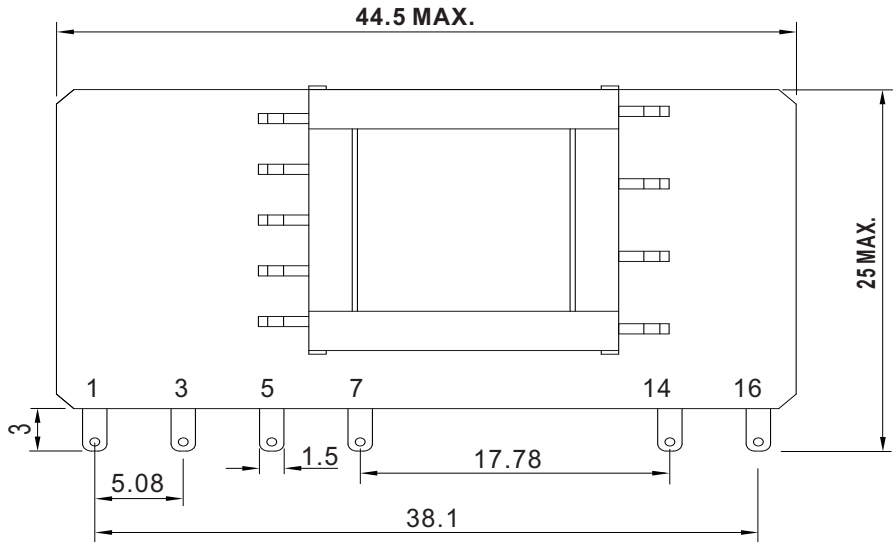


(Front View)

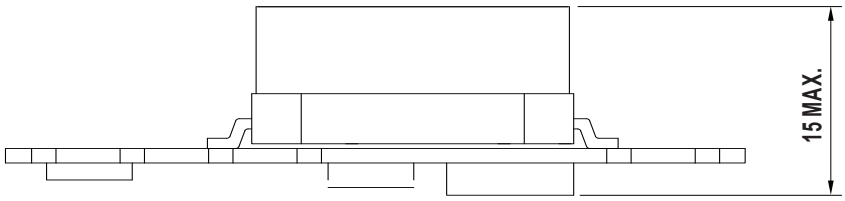

(Side View)

■ Pin Assignment


Pin-Out	
Pin No.	Output
1	AC/N
3	AC/L
5	+V(cap)
7	-V(cap)
14	-Vout
16	+Vout

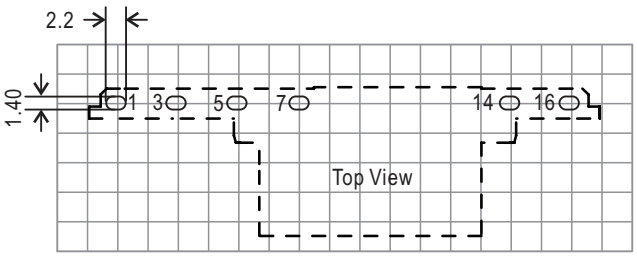


Note: Grid 2.54*2.54mm

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

IOB-15-xxB (Vertical Type)

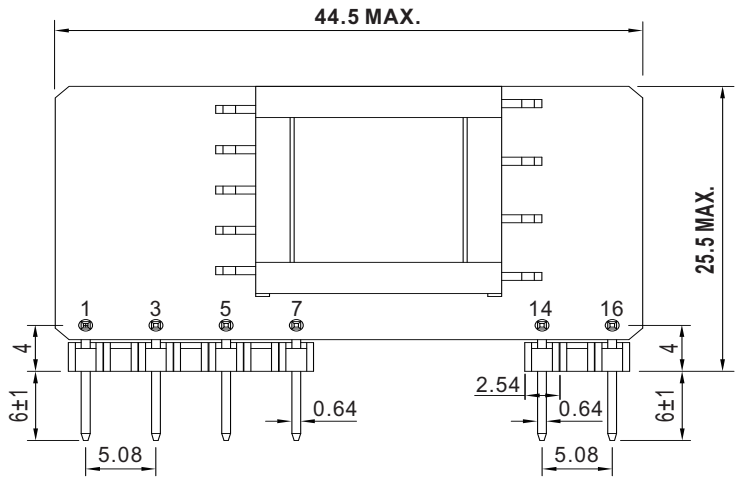


(Front View)

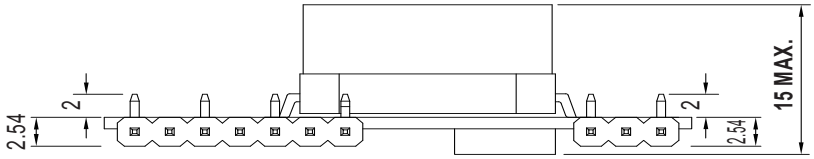

(Side View)

■ Pin Assignment


Pin-Out	
Pin No.	Output
1	AC/N
3	AC/L
5	+V(cap)
7	-V(cap)
14	-Vout
16	+Vout

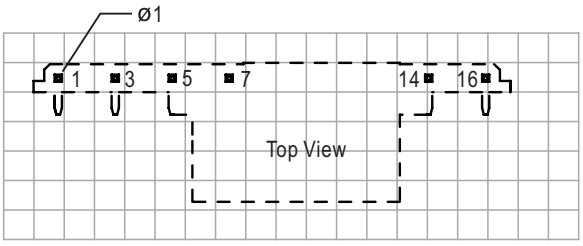


Note: Grid 2.54*2.54mm

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

IOB-15-xxC (Horizontal Type)

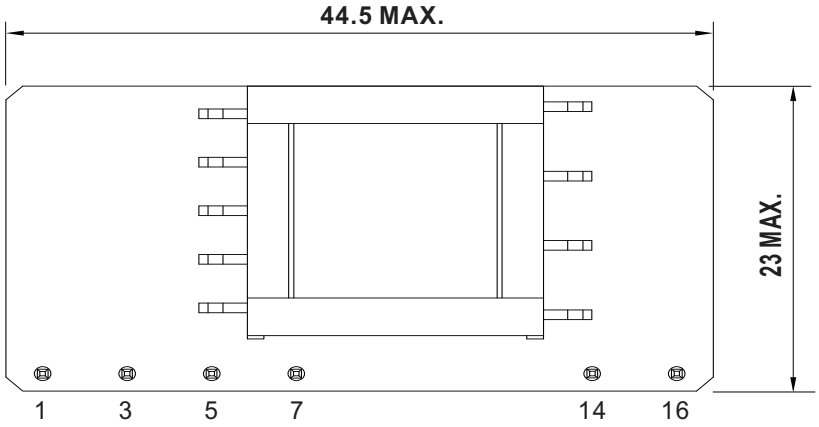


(Front View)

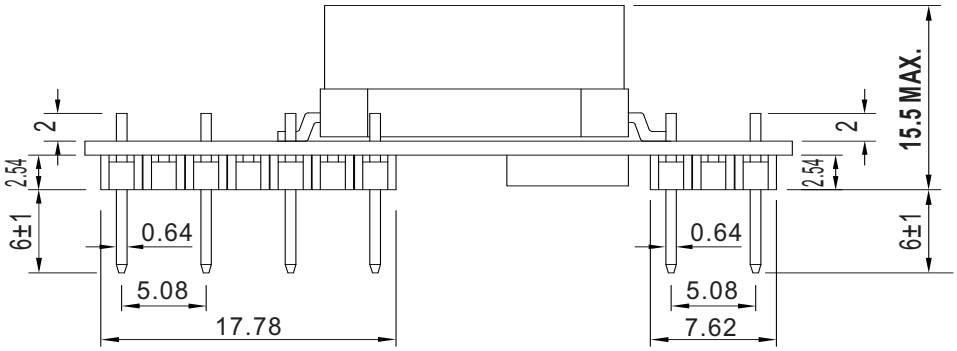

(Side View)

■ Pin Assignment



Pin-Out	
Pin No.	Output
1	AC/N
3	AC/L
5	+V(cap)
7	-V(cap)
14	-Vout
16	+Vout

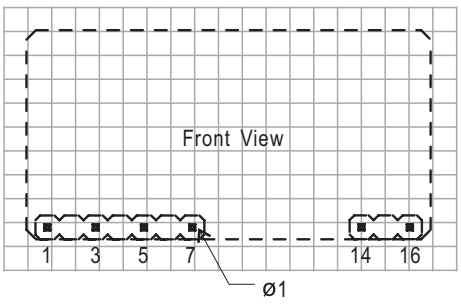



Note: Grid 2.54*2.54mm

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

■ Packing

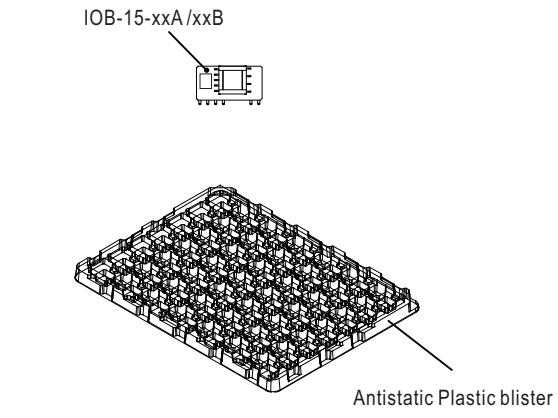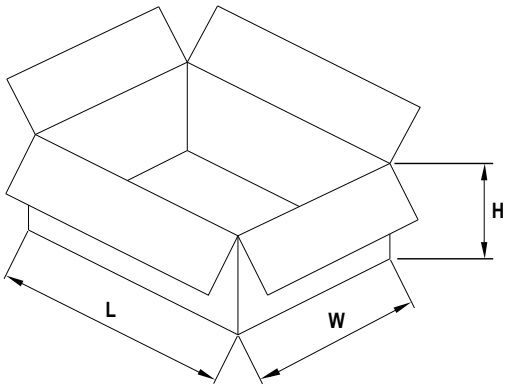Standard Packing	IOB-15-xxA /xxB			
	MPQ Per Tray(PCS)	One Tray G.W.	Max. Q'TY/ Carton(PCS)	One Carton G.W.
Unit : mm   CARTON L457 x W342 x H227	49	660g	637	10.5Kg

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

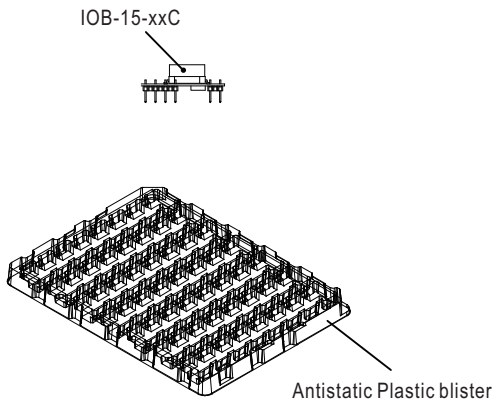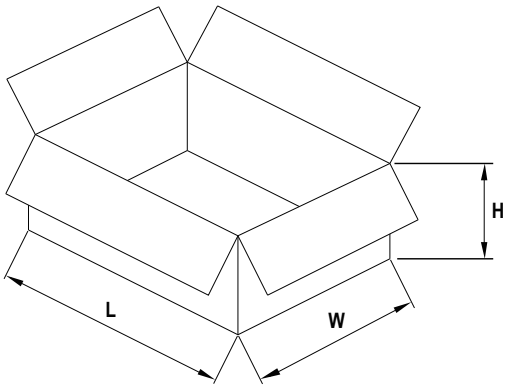Standard Packing	IOB-15-xxC			
	MPQ Per Tray(PCS)	One Tray G.W.	Max. Q'TY/ Carton(PCS)	One Carton G.W.
Unit : mm   CARTON L457 x W342 x H227	56	745g	448	8.5Kg

■ Installation Manual

Please refer to : http://www.meanwell.com/manual.html

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000