90W AC-DC Reliable Wall-mounted Interchangeable Type Green Adaptor NGE90 series



(NGE90I)



(NGE90E)



(NGE90U)

User's Manual

UL62368-1 | ANSI/AAMI ES60601-1 ES60601-1-11 | J62368-1 | R33100 RoHS | GB4943.1 | AS/NZS 62368.1 AS/NZS 61558.1/.2.16 | TPTC004 | KC62368-1 | IS13252

IEC62368-1 IEC60601-1/-1-11 IEC61558-1/-2-16 IEC60335-1 | BS EN/EN62368-1 BS EN/EN60601-1/-1-11 BS EN/EN61558-1-2-16 BS EN/EN60335-1

Energy Verified Rendement Énergétique Vérifié

IP21

ECO | Household | Automate | Industrial | Security

Network | Telecom | Medical | 2xMOPP | BF rated

Features

- MEAN WELL Patent Application Number: 202330347779.4
- Interchangeable AC plugs (I-Type)
- Global certificates in multi-fields
  (ITE 62368-1, Medical 60601-1, Household 60335-1,Industrial 61558-1/-2-16)
- 80~264Vac Universal AC input
- Ultra slim(30mm)
- No load power consumption< 0.1W
- Energy efficiency Level Ⅵ
- Class Ⅱ power (no earth pin)
- Protections: Short circuit / Overload / Over voltage
- Extremely low leakage current <100uA
- -30℃~+70℃ wide range working temperature
- Various DC plug quick adapter accessory available
  (Plug kit sold sperately, please refer to : https://www.meanwell.com/upload/pdf/DC_plug.pdf)
- 3 years warranty

Applications

- Consumer electronic devices
- Telecommunication devices
- Office facilities
- Industrial equipments
- Power sourcing equipment of PoE
- Medical devices
- Household devices

GTIN CODE

MW Search: https://www.meanwell.com/serviceGTIN.aspx

Description

NGE90 is a highly reliable, 90W wall-mounted style single-output green adaptor series, which is compact and convenient for carry. This product is equipped with 7 types of interchangeable AC plug (European, USA,U.K. ,Australian, China, Korea and India type) that makes it very suitable for travel use.NGE90 is a Class Ⅱ power unit (no FG), accepting the input range from 80VAC to 264VAC that it can satisfy the demands for various types of electrical devices.

With the working efficiency up to 92% and the extremely low no-load power consumption below 0.1W, NGE90 is compliant with the latest USA energy regulation EISA 2007/DoE, Canada NRCan,Australia and New Zealand MEPS, Korea KMEPS, EU ErP and CoC version 5. The supreme feature allows the adaptor to save the energy when it is under either the operating mode or the standby mode. The entire series is approved for ITE, medical, household and industrial appliance safety regulations; moreover, it adopts the 94V-0 flame retardant plastic case that it can effectively prevent users from electric hazard.

Model Encoding

NGE 90 I 12 -P1J

- DC plug type: P1J :Plug for standard model, 2.1φ×5.5φ×11mm,C+ tuning fork type; Other options available by customer requested (see Page 6~7)
- Output voltage (12V/15V/18V/24V/48V/55V)
- AC Plug: I : AC Pin fixed; Universal version with interchangeable plugs; E : AC Pin fixed; EU version with non-interchangeable plug; U : Foldable AC Pin; US version with non-interchangeable plug
- Rated wattage
- Series name

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

90W AC-DC Reliable Wall-mounted Interchangeable Type Green Adaptor NGE90 series


SPECIFICATION		NGE90◯12-P1J	NGE90◯15-P1J	NGE90◯18-P1J	NGE90◯24-P1J	NGE90◯48-P1J	NGE90◯55-P1J
		◯ = I, U, E					
OUTPUT							
DC VOLTAGE	Note.2	12V	15V	18V	24V	48V	55V
RATED CURRENT		6.25A	5.5A	5A	3.75A	1.875A	1.64A
CURRENT RANGE		0 ~ 6.25A	0 ~ 5.5A	0 ~ 5A	0 ~ 3.75A	0 ~ 1.875A	0 ~ 1.64A
RATED POWER		75W	82.5W	90W	90W	90W	90.2W
RIPPLE & NOISE (max.)	Note.3	120mVp-p	150mVp-p	180mVp-p	240mVp-p	240mVp-p	240mVp-p
VOLTAGE TOLERANCE	Note.4	±4.0%	±4.0%	±4.0%	±3.0%	±3.0%	±3.0%
LINE REGULATION	Note.5	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
LOAD REGULATION	Note.6	±4.0%	±4.0%	±4.0%	±3.0%	±2.0%	±2.0%
SETUP, RISE, HOLD UP TIME		1000ms, 60ms, 30ms / 230Vac		1000ms, 60ms, 10ms / 115Vac at full load			
INPUT							
VOLTAGE RANGE	Note.7	80 ~ 264Vac 113 ~ 370Vdc					
FREQUENCY RANGE		47 ~ 63Hz					
EFFICIENCY (Typ.)		90%	91%	91.5%	92%	92%	92%
AC CURRENT		1.8A / 115Vac 0.9A / 230Vac					
INRUSH CURRENT (max.)		COLD START 50A / 115Vac 100A / 230Vac					
LEAKAGE CURRENT (max.)		Touch current < 100uA (rms) @264Vac					
PROTECTION							
OVERLOAD		105% ~ 160% rated output power					
		Protection type : 12~24V Hiccup mode, recovers automatically after fault condition is removed. 48~55V Shut down and latch off o/p voltage, re-power on to recover.					
OVER VOLTAGE		12.6 ~ 16.2	15.8 ~ 20.3	19.8 ~ 24.3	26.4 ~ 32.4	52.8 ~ 64.8	60.5 ~ 74.2
		Protection type : Shout donw O/P vlotage, re-power on to recover					
ENVIRONMENT							
WORKING TEMP.		-30 ~ +70℃ (Refer to "Derating Curve")					
WORKING HUMIDITY		20% ~ 90% RH non-condensing					
STORAGE TEMP., HUMIDITY		-20 ~ +85℃, 10 ~ 95% RH non-condensing					
TEMP. COEFFICIENT		±0.03% / ℃ (0 ~ 45℃)					
VIBRATION		10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes					
SAFETY & EMC	Note.8						
SAFETY STANDARDS		CB IEC62368-1, IEC60601-1/-1-11, IEC61558-1/-2-16, IEC60335-1; UL UL62368-1, CSA C22.2 NO. 62368-1, ANSI/AAMI ES60601-1/-1-11(3.2 Version), CAN/CSA-C22.2 NO.60601-1/-1-11; ANSI/AAMI ES60601-1-11, CAN/CSA-C22.2 NO.60601-1-11(for U Type only) DEKRA BS EN/EN62368-1, BS EN/EN60601-1/-1-11, BS EN/EN61558-1/-2-16, BS EN/EN60335-1; PSE J62368-1; BSMI CNS15598-1; RCM AS/NZS 62368.1, AS/NZS 61558.1/.2.16; EAC TPTC004; CCC GB4943.1 approved. KC KC62368-1; BIS IS13252(part1):2010/IEC60950-1:2005. (Please refer to next page for more details)					
WITHSTAND VOLTAGE		I/P-O/P:4000Vac					
ISOLATION RESISTANCE		I/P-O/P:100M Ohms / 500VDC / 25℃/ 70% RH					
EMC EMISSION		**Parameter**	**Standard**			**Test Level / Note**	
		Conducted emission	BS EN/EN55032(CISPR32)/EN55011 , FCC Part15 , CNS15936, GB/T 9254.1-2021, KS C 9832			Class B	
		Radiated emission	BS EN/EN55032(CISPR32)/EN55011 , FCC Part15 , CNS15936, GB/T 9254.1-2021, KS C 9832			Class B	
		Harmonic current	BS EN/EN61000-3-2			Class A	
EMC IMMUNITY		BS EN/EN55035(CISPR35), BS EN/EN60601-1-2(IEC60601-1-2),KS C 9835					
		Parameter	**Standard**			**Test Level /Note**	
		ESD	BS EN/EN61000-4-2			Level 4, 15KV air; Level 4,8KV contact	
		RF field susceptibility	BS EN/EN61000-4-3			Level 2, 3V/m	
		EFT bursts	BS EN/EN61000-4-4			Level 3, 2KV	
		Surge susceptibility	BS EN/EN61000-4-5			Level 3, 1KV/L-N	
		Conducted susceptibility	BS EN/EN61000-4-6			Level 2, 3V	
		Magnetic field immunity	BS EN/EN61000-4-8			Level 2, 3A/m	
		Voltage dips , interruption	BS EN/EN61000-4-11			＞95% dip 0. 5 periods, 30% dip 25 periods, ＞95% interruptions 250 periods	
OTHERS							
MTBF		605.3 Khrs min. MIL-HDBK-217F (25℃) 5120.6 Khrs min. Telcordia TR/SR-332(Bellcore) (25℃)					
DIMENSION		62*30*85.5mm (L*W*H)					
PACKING	MAIN BODY	217g; 54pcs/ 13.2Kg / 0.93CUFT for NGE90Ixx/Uxx-P1J 231g; 42pcs/ 11.6Kg / 1.13CUFT for NGE90Exx-P1J					
	AC PLUGS	Refer to Page 3					
DC OUTPUT CONNECTOR							
PLUG		See page 6~7 ; Other type available by customer requested					
CABLE		See page 6~7 ; Other type available by customer requested					

NOTE

1.All parameters are specified at 230VAC input, rated load, 25℃ 70% RH ambient.
2.DC voltage: The output voltage set at point measure by plug terminal & 50% load.
3.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1 μF & 47 μF capacitor.
4.Tolerance: includes set up tolerance, line regulation, load regulation.
5.Line regulation is measured from low line to high line at rated load.
6.Load regulation is measured from 0% to 100% rated load
7.Derating may be needed under low input voltage. Please check the derating curve for more details.
8.The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to “EMI testing of component power supplies.” (as available on https://www.meanwell.com//Upload/PDF/EMI_statement_en.pdf)
9.Design meet US DoE Level VII (from Docket number EERE-2020-BT-STD-0006).
※ Product Liability Disclaimer ： For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

■ Interchangeable AC Plug Specifically for NGE12/18/30/45/65/90 (I-Type)

Order NO.	NGE90Ixx-P1J (Universal Version) 							NGE90Exx-P1J (EU Version) 	NGE90Uxx-P1J (US Version) 	
AC plug	Interchangeable Type (Unfoldable; AC Pin fixed)							Non-Interchangeable Type		
	EU 	US 	UK 	AU 	CN 	KR 	IN 	Unfoldable AC Pin	Foldable AC Pin	
Certificate	CB DEKRA     R33100 RoHS							CB DEKRA 	CB  R33100 RoHS	

■ AC Plugs Accessory (Sold Seperately)

MW's order NO.	Per Unit	Per Bag	Per Carton	
		Q'Ty	Q'Ty	G.W.
AC PLUG-EU4		30 pcs	300 pcs (10 bags)	5.4Kg
AC PLUG-US4		30 pcs	300 pcs (10 bags)	4.7Kg
AC PLUG-UK4		30 pcs	300 pcs (10 bags)	7.1Kg
AC PLUG-AU4		30 pcs	300 pcs (10 bags)	5.2Kg
AC PLUG-CN4		30 pcs	300 pcs (10 bags)	4.8Kg
AC PLUG-KR4		30 pcs	300 pcs (10 bags)	6.3Kg
AC PLUG-IN4		30 pcs	300 pcs (10 bags)	7.7Kg
AC PLUG-MIX4	 (Per Set)	30 pcs (5 Types*6 mixed bags)	300 pcs (5 Types*6 mixed bags) (10 bags)	5.45Kg
AC PLUG-MIX5	 (Per Set)	35 pcs (7 Types*5 mixed bags)	315 pcs (7 Types*5 mixed bags) (9 bags)	6.13Kg

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

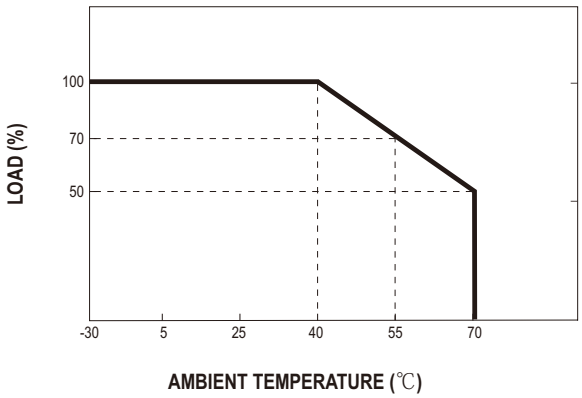
■ Interchangeable AC Plug Installation Steps (Convertible with I Type only)

Step1	Step2
	
Slide in AC converter along the guided rail between the metal prongs until it is locked in (with a “click” sound).	Check if the new plug type is stable and correct before use.

Note:

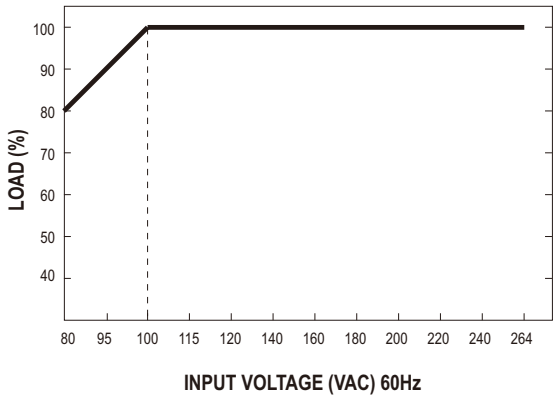
1. NGE90I main body unit and AC inlet plug should be ordered separately.
2. NGE90I needs to be used along with one of the AC inlet plug (EU,US,UK,AU,CN,KR,IN).

■ Derating Curve



Note: 48V/55V: -20℃@80Vac, load reduced to 60%;
-30℃@80Vac, load reduced to 35%.

■ Static Characteristics



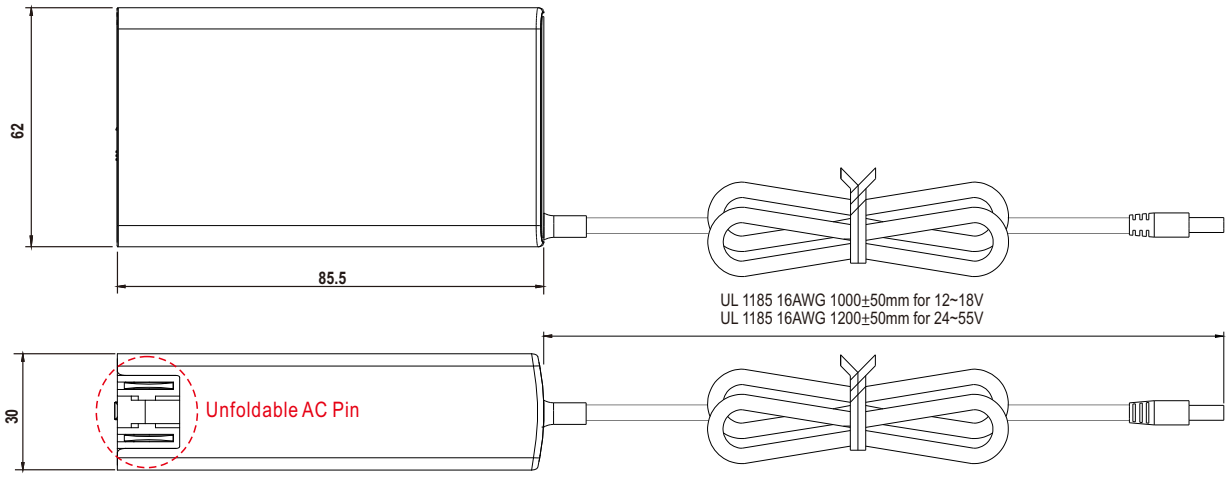
LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

■ Mechanical Specification

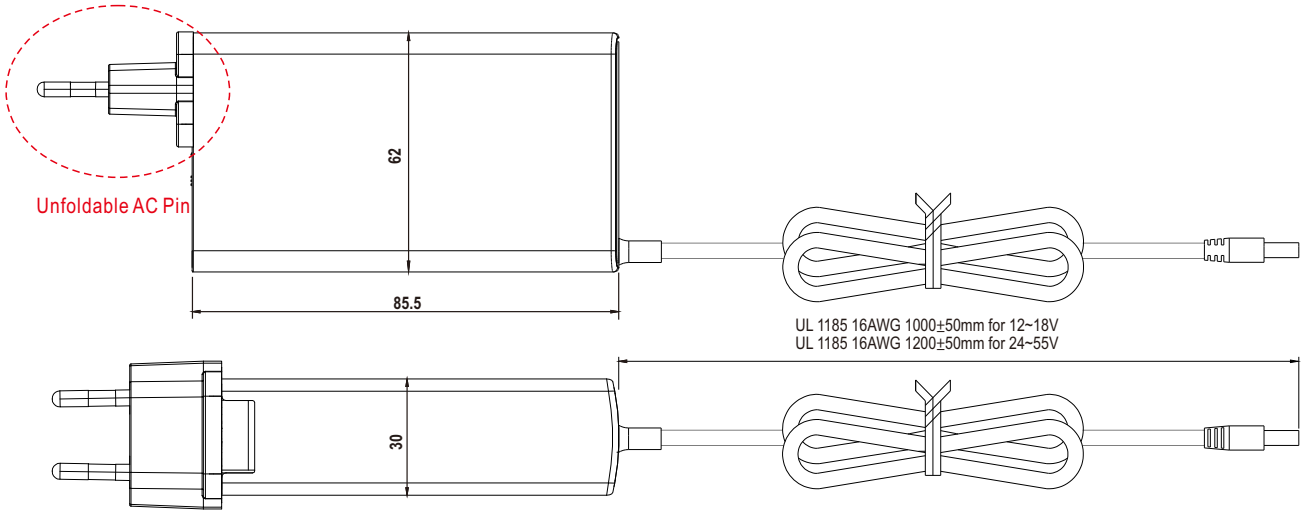
(Unit: mm , tolerance ± 1mm)

Case No.NGE65

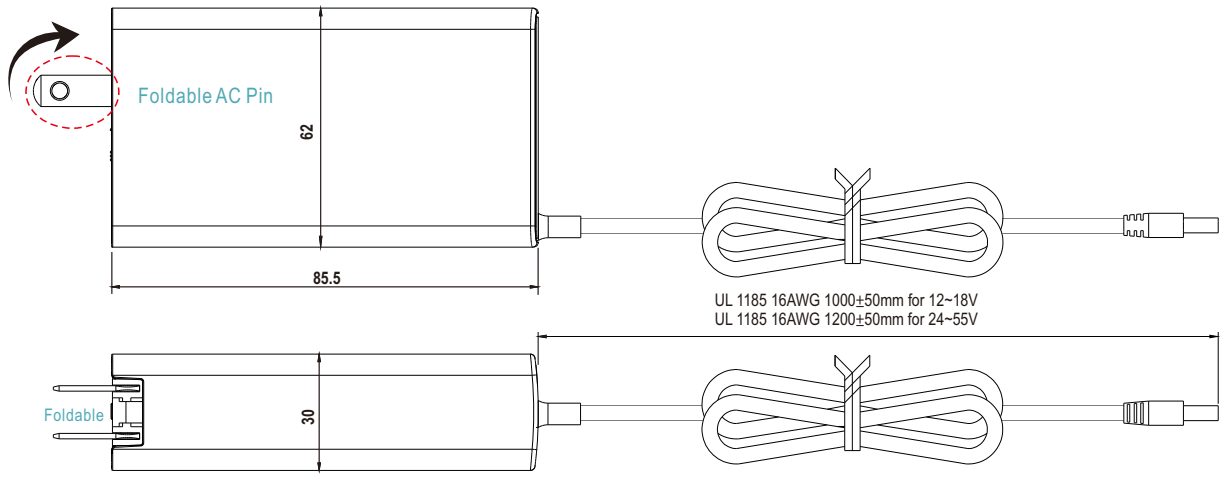
NGE90Ixx-P1J (Universal Version - AC Pin fixed; With interchangeable plugs) :



NGE90Exx-P1J (EU Version - AC Pin fixed; With non-interchangeable plug) :



NGE90Uxx-P1J (US Version - Foldable AC Pin; With non-interchangeable plug) :





Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

■ DC Output Plug

◎ Standard plug: P1J

Unit:mm

P1J	Pin Assignment
	

◎ DC plug changeable through:

(1) Customization of the standard part with an optional DC plug according to the table (MOQ applicable)






(2) Quick adapter accessory (sold separately without MOQ)

Please refer to below table and online selection guide : https://www.meanwell.com/upload/pdf/DC_plug.pdf


Example quick adapter accessory:





◎ Optional DC plug: (Available in customized cable or quick adapter)


Tuning Fork Style		Type No.	A / OD	B / ID	C / L	Quick Adapter Accessory
	 (Straight)	P1I	5.5	2.1	9.5	Available (Current rating: 7.5A max.)
		P1L	5.5	2.5	9.5	
		P1M	5.5	2.5	11.0	
	 (Right-angled)	P1IR	5.5	2.1	9.5	
		P1JR	5.5	2.1	11.0	
		P1LR	5.5	2.5	9.5	
		P1MR	5.5	2.5	11.0	
Barrel Style		Type No.	A / OD	B / ID	C / L	
	 (Straight)	P2I	5.5	2.1	9.5	None
		P2J	5.5	2.1	11.0	
		P2L	5.5	2.5	9.5	
		P2M	5.5	2.5	11.0	
	 (Right-angled)	P2IR	5.5	2.1	9.5	
		P2JR	5.5	2.1	11.0	
		P2LR	5.5	2.5	9.5	
		P2MR	5.5	2.5	11.0	
Lock Style		Type No.	A / OD	B / ID	C / L	
	 SWITCHCRAFT original or equivalent	P2S(S761K)	5.53	2.03	12.06	None
		P2K(761K)	5.53	2.54	12.06	
		P2C(S760K)	5.53	2.03	9.52	
		P2D(760K)	5.53	2.54	9.52	

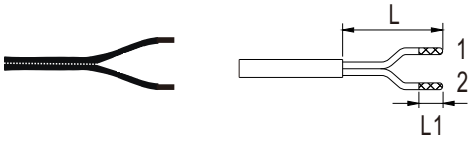
LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Min. Pin Style	Type No.	A OD	B ID	C L	Quick Adapter Accessory
 EIAJ equivalent	P3A	2.35	0.7	11.0	Available (Current rating: 5A max.)
	P3B	4.0	1.7	11.0	
	P3C	4.75	1.7	11.0	

Center Pin Style	Type No.	A OD	B ID	C L	D Center Pin	
 EIAJ equivalent	P4A	5.5	3.4	11.0	1.0	Available (Current rating: 7.5A max.)
	P4B	6.5	4.4	11.0	1.4	
	P4C	7.4	5.1	11.0	0.6	

Min. DIN 3 Pin with Lock (male)	Type No.	Pin Assignment PIN No.	Output	
 KYCON KPPX-3P equivalent	R6B	1	+Vo	Available (Current rating: 7.5A max.)
		2	-Vo	
		3	+Vo	

Min. DIN 4 Pin with Lock (male)	Type No.	Pin Assignment PIN No.	Output	
 KYCON KPPX-4P equivalent	R7B	1	+Vo	Available (Current rating: 7.5A max.)
		2	-Vo	
		3	-Vo	
		4	+Vo	

Stripped and tinned leads	Type No.	Pin Assignment PIN No.	Output	
 Length of Land L1 by request (MW's standard length, L: 25 mm, L1: 10 mm)	by customer	1 (Ribbed)	+Vo	None
		2 (Letter)	-Vo	

■ Installation Manual

Please refer to : http://www.meanwell.com/manual.html

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000