145W Reliable Triple Output Medical Grade RPT-160 series

User's Manual



(Standard)



(Optional)

ANSI/AAMI ES60601-1 (except -C type) BS EN/EN60601-1 IEC60601-1 TPT004

(G model)

Features

- 5"×3" compact size
- Medical safety approved (2 x MOPP) according to ANSI/AAMI ES60601-1 and IEC/BS EN/EN 60601-1
- Suitable for BF application with appropriate system consideration
- 100W convection, 145W force air
- EMI Class B for Class Ⅰ configuration
- No load power consumption<0.75W by PS-ON control (G model)
- Extremely low leakage current
- 5Vdc standby output, Power Good, Power Fail
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Lifetime > 85K hours
- 3 years warranty

Applications

- Oral irrigator
- Hemodialysis machine
- Medical monitors
- Sleep apnea devices
- Pumps machine

GTIN CODE

MW Search: https://www.meanwell.com/serviceGTIN.aspx

Description

RPT(G)-160 is a 145W highly reliable PCB type medical power supply with a high power density on the 5" by 3" footprint. It accepts 90~264VAC input and offers triple output voltages. The extremely low leakage current is less than 160μA. In addition, it conforms to international medical regulations (2*MOPP) and EMC BS EN/EN55011, perfectly fitting all kinds of BF rated "patient contact" medical system equipment. RPT(G)-160 series also offers the enclosed style model [RPT(G)-160-C].

Model Encoding

RPT G - 160 A -C

- -C: Type
- A: Output voltage
- 160: Rated wattage
- G: Green model, with $5V_{sb}$ and no load < 0.75W
- RPT: Series name

Type	Description	Note
Blank	PCB Type	In Stock
C	Enclosed casing type	Optional

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

SPECIFICATION for PCB Type(standard)

MODEL			RPT(G)-160A			RPT(G)-160B			RPT(G)-160C			RPT(G)-160D		
OUTPUT	OUTPUT NUMBER		CH1	CH2	CH3	CH1	CH2	CH3	CH1	CH2	CH3	CH1	CH2	CH3
	DC VOLTAGE		5V	12V	-5V	5V	12V	-12V	5V	15V	-15V	5V	12V	24V
	CURRENT	RATED (20.5CFM)	14A	5.5A	1A	14A	5A	1A	14A	3.6A	1A	11A	5A	1.2A
		RANGE (20.5CFM)	0.6 ~ 14A	0.2 ~ 5.5A	0.1 ~ 1A	0.6 ~ 14A	0.2 ~ 5A	0.1 ~ 1A	0.6 ~ 14A	0.1 ~ 3.6A	0.1 ~ 1A	0.3 ~ 11A	0.2 ~ 5A	0.15 ~ 1.2A
		RANGE (convection)	0.6 ~ 9A	0.2 ~ 3.8A	0.1 ~ 0.6A	0.6 ~ 9A	0.2 ~ 3.4A	0.1 ~ 0.8A	0.6 ~ 9A	0.1 ~ 2.6A	0.1 ~ 0.8A	0.3 ~ 8A	0.2 ~ 2.6A	0.15 ~ 1A
	RATED POWER	20.5CFM Note.2	145W			146W			143W			147.8W		
		Convection Note.3	98.6W			98.4W			99W			98.2W		
	RIPPLE & NOISE (max.) Note.4		60mVp-p	80mVp-p	120mVp-p	60mVp-p	100mVp-p	100mVp-p	60mVp-p	80mVp-p	100mVp-p	80mVp-p	100mVp-p	120mVp-p
	VOLTAGE ADJ. RANGE		CH1:5 ~ 5.5V											
	VOLTAGE TOLERANCE Note.5		±2.0%	±5.0%	-5,+7%	±2.0%	±5.0%	-4,+5%	±2.0%	±4.0%	±8.0%	±2.0%	±5.0%	+7,-5%
	LINE REGULATION		±0.5%	±1.0%	±1.0%	±0.5%	±1.0%	±1.0%	±0.5%	±1.0%	±1.0%	±0.5%	±1.0%	±1.0%
	LOAD REGULATION		±1.5%	±3.0%	-5,+6%	±1.5%	±3.0%	-4,+5%	±2.0%	±3.0%	±8.0%	±1.5%	±3.0%	-3,+4%
	SETUP, RISE TIME		1800ms, 30ms/230VAC 3500ms, 30ms/115VAC at full load											
	HOLD UP TIME (Typ.)		30ms/230VAC 20ms/115VAC at full load											
INPUT	VOLTAGE RANGE Note.6		90 ~ 264VAC 127 ~ 370VDC											
	FREQUENCY RANGE		47 ~ 63Hz											
	POWER FACTOR (Typ.)		PF>0.93/230VAC PF>0.98/115VAC at full load											
	EFFICIENCY (Typ.)		84%			84%			83%			83%		
	AC CURRENT (Typ.)		1.8A/115VAC 0.9A/230VAC											
	INRUSH CURRENT (Typ.)		COLD START 35A/115VAC 70A/230VAC											
	LEAKAGE CURRENT (max.) Note.7		Earth leakage current < 160 μA/264VAC , Touch current < 100 μA/264VAC											
PROTECTION	OVERLOAD		105 ~ 135% rated output power											
			Protection type : Hiccup mode, recovers automatically after fault condition is removed											
	OVER VOLTAGE		Ch1: 5.7 ~ 6.8V											
			Protection type : Shut down o/p voltage, re-power on to recover											
	OVER TEMPERATURE		TSW1: Shut down o/p voltage, recovers automatically after temperature goes down											
			TSW2: Shut down o/p voltage, re-power on to recover											
FUNCTION	5V STANDBY (G model)		5Vsb : 5V@0.6A without fan, 0.8A with fan 20.5CFM ; Tolerance ± 2%, ripple : 50mVp-p(max.)											
	PS-ON INPUT SIGNAL (G model)		Power on: PS-ON = "Hi" or " > 2 ~ 5V" ; Power off: PS-ON = "Low" or " < 0 ~ 0.5V"											
	POWER GOOD / POWER FAIL		500ms>PG>10ms PF>1ms											
ENVIRONMENT	WORKING TEMP.		-20 ~ +70℃ (Refer to "Derating Curve")											
	WORKING HUMIDITY		20 ~ 90% RH non-condensing											
	STORAGE TEMP., HUMIDITY		-40 ~ +85℃, 10 ~ 95% RH non-condensing											
	TEMP. COEFFICIENT		±0.03%/℃ (0 ~ 50℃)											
	VIBRATION		10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes											
	OPERATING ALTITUDE Note.8		3000 meters											
SAFETY & EMC (Note 10)	SAFETY STANDARDS		IEC 60601-1:2005+A1, TUV BS EN/ EN 60601-1:2006+A1+A12+A2, ANSI/AAMI ES60601-1:2005+A2 CAN/CSA C22.2 No. 60601-1:2014+A2, EAC TP TC 004 approved; Design refer to BS EN/EN60335-1(by request)											
	ISOLATION LEVEL		Primary-Secondary: 2xMOPP, Primary-Earth:1xMOPP, Secondary-Earth:1xMOPP											
	WITHSTAND VOLTAGE		I/P-O/P:4KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC											
	ISOLATION RESISTANCE		I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25℃/ 70% RH											
	EMC EMISSION		**Parameter**			**Standard**			**Test Level / Note**					
			Conducted emission			BS EN/EN55011 (CISPR11)			Class B					
			Radiated emission			BS EN/EN55011 (CISPR11)			Class B					
			Harmonic current			BS EN/EN61000-3-2			Class A					
			Voltage flicker			BS EN/EN61000-3-3			-----					
	EMC IMMUNITY		BS EN/EN55035, BS EN/EN60601-1-2											
			Parameter			**Standard**			**Test Level / Note**					
			ESD			BS EN/EN61000-4-2			Level 4, 15KV air ; Level 4, 8KV contact					
			RF field susceptibility			BS EN/EN61000-4-3			Level 3, 10V/m(80MHz~2.7GHz) Table 9, 9~28V/m(385MHz~5.78GHz)					
			EFT bursts			BS EN/EN61000-4-4			Level 3, 2KV					
			Surge susceptibility			BS EN/EN61000-4-5			Level 3, 2KV/Line-FG ; 1KV/Line-Line					
			Conducted susceptibility			BS EN/EN61000-4-6			Level 3, 10V					
			Magnetic field immunity			BS EN/EN61000-4-8			Level 4, 30A/m					
			Voltage dip, interruption			BS EN/EN61000-4-11			100% dip 1 periods, 30% dip 25 periods, 100% interruptions 250 periods					
OTHERS	MTBF		1719.1K hrs min. Telcordia SR-332 (Bellcore) ; 175.1K hrs min. MIL-HDBK-217F (25℃)											
	DIMENSION (L*W*H)		PCB type: 127*76.2*34.6mm or 5"*3"*1.36" inch											
	PACKING		0.33Kg; 36pcs/12.9Kg/0.96CUFT											

NOTE

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature.
2. The rated power includes 5Vsb @ 0.8A.
3. The rated power includes 5Vsb @ 0.6A.
4. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 μF & 47 μF parallel capacitor.
5. Tolerance : includes set up tolerance, line regulation and load regulation.
6. Derating may be needed under low input voltages. Please check the derating curve for more details.
7. Touch current was measured from primary input to DC output.
8. The ambient temperature derating of 3.5℃/1000m with fanless models and of 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft).
9. HS1,HS2 & HS3 can not be shorted.
10. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies."
    (as available on https://www.meanwell.com//Upload/PDF/EMI_statement_en.pdf)

※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

SPECIFICATION for Enclosed Type(optional)

MODEL			RPT(G)-160A-C			RPT(G)-160B-C			RPT(G)-160C-C			RPT(G)-160D-C		
OUTPUT	OUTPUT NUMBER		CH1	CH2	CH3	CH1	CH2	CH3	CH1	CH2	CH3	CH1	CH2	CH3
	DC VOLTAGE		5V	12V	-5V	5V	12V	-12V	5V	15V	-15V	5V	12V	24V
	CURRENT	RATED (20.5CFM)	13.3A	5.2A	0.95A	13.3A	4.8A	0.95A	13.3A	3.4A	0.95A	10.5A	4.8A	1.14A
		RANGE (20.5CFM)	0.6 ~ 13.3A	0.2 ~ 5.2A	0.1 ~ 0.95A	0.6 ~ 13.3A	0.2 ~ 4.8A	0.1 ~ 0.95A	0.6 ~ 13.3A	0.1 ~ 3.4A	0.1 ~ 0.95A	0.3 ~ 10.5A	0.2 ~ 4.8A	0.15 ~ 1.14A
		RANGE (convection)	0.6 ~ 8.5A	0.2 ~ 3.6A	0.1 ~ 0.57A	0.6 ~ 8.5A	0.2 ~ 3.2A	0.1 ~ 0.76A	0.6 ~ 8.5A	0.1 ~ 2.5A	0.1 ~ 0.76A	0.3 ~ 7.6A	0.2 ~ 2.5A	0.15 ~ 0.95A
	RATED POWER	20.5CFM Note.2	137.7W			139.5W			135.8W			141.5W		
		Convection Note.3	91.6W			93W			94.4W			93.8W		
	RIPPLE & NOISE (max.) Note.4		60mVp-p	80mVp-p	120mVp-p	60mVp-p	100mVp-p	100mVp-p	60mVp-p	80mVp-p	100mVp-p	80mVp-p	100mVp-p	120mVp-p
	VOLTAGE ADJ. RANGE		CH1:5 ~ 5.5V											
	VOLTAGE TOLERANCE Note.5		±2.0%	±5.0%	-5,+7%	±2.0%	±5.0%	-4,+5%	±2.0%	±4.0%	±8.0%	±2.0%	±5.0%	+7,-5%
	LINE REGULATION		±0.5%	±1.0%	±1.0%	±0.5%	±1.0%	±1.0%	±0.5%	±1.0%	±1.0%	±0.5%	±1.0%	±1.0%
	LOAD REGULATION		±1.5%	±3.0%	-5,+6%	±1.5%	±3.0%	-4,+5%	±2.0%	±3.0%	±8.0%	±1.5%	±3.0%	-3,+4%
	SETUP, RISE TIME		1800ms, 30ms/230VAC 3500ms, 30ms/115VAC at full load											
	HOLD UP TIME (Typ.)		30ms/230VAC 20ms/115VAC at full load											
INPUT	VOLTAGE RANGE Note.6		90 ~ 264VAC 127 ~ 370VDC											
	FREQUENCY RANGE		47 ~ 63Hz											
	POWER FACTOR (Typ.)		PF>0.93/230VAC PF>0.98/115VAC at full load											
	EFFICIENCY (Typ.)		84%			84%			83%			83%		
	AC CURRENT (Typ.)		1.8A/115VAC 0.9A/230VAC											
	INRUSH CURRENT (Typ.)		COLD START 35A/115VAC 70A/230VAC											
	LEAKAGE CURRENT (max.) Note.7		Earth leakage current < 160 μA/264VAC , Touch current < 100 μA/264VAC											
PROTECTION	OVERLOAD		105 ~ 135% rated output power											
			Protection type : Hiccup mode, recovers automatically after fault condition is removed											
	OVER VOLTAGE		Ch1: 5.7 ~ 6.8V											
			Protection type : Shut down o/p voltage, re-power on to recover											
	OVER TEMPERATURE		TSW1: Shut down o/p voltage, recovers automatically after temperature goes down											
			TSW2: Shut down o/p voltage, re-power on to recover											
FUNCTION	5V STANDBY (G model)		5Vsb : 5V@0.6A without fan, 0.8A with fan 20.5CFM ; Tolerance ± 2%, ripple : 50mVp-p(max.)											
	PS-ON INPUT SIGNAL (G model)		Power on: PS-ON = "Hi" or " > 2 ~ 5V" ; Power off: PS-ON = "Low" or " < 0 ~ 0.5V"											
	POWER GOOD / POWER FAIL		500ms>PG>10ms PF>1ms											
ENVIRONMENT	WORKING TEMP.		-20 ~ +70℃ (Refer to "Derating Curve")											
	WORKING HUMIDITY		20 ~ 90% RH non-condensing											
	STORAGE TEMP., HUMIDITY		-40 ~ +85℃, 10 ~ 95% RH non-condensing											
	TEMP. COEFFICIENT		±0.03%/℃ (0 ~ 50℃)											
	VIBRATION		10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes											
	OPERATING ALTITUDE Note.8		3000 meters											
SAFETY & EMC (Note 10)	SAFETY STANDARDS		Design refer to IEC60601-1, EAC TP TC 004,TUV BS EN/EN60601-1(Pending for CB/TUV)											
	ISOLATION LEVEL		Primary-Secondary: 2xMOPP, Primary-Earth:1xMOPP, Secondary-Earth:1xMOPP											
	WITHSTAND VOLTAGE		I/P-O/P:4KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC											
	ISOLATION RESISTANCE		I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25℃/ 70% RH											
	EMC EMISSION		**Parameter**			**Standard**			**Test Level / Note**					
			Conducted emission			BS EN/EN55011 (CISPR11)			Class B					
			Radiated emission			BS EN/EN55011 (CISPR11)			Class B					
			Harmonic current			BS EN/EN61000-3-2			Class A					
			Voltage flicker			BS EN/EN61000-3-3			-----					
	EMC IMMUNITY		BS EN/EN55035, BS EN/EN60601-1-2											
			Parameter			**Standard**			**Test Level / Note**					
			ESD			BS EN/EN61000-4-2			Level 4, 15KV air ; Level 4, 8KV contact					
			RF field susceptibility			BS EN/EN61000-4-3			Level 3, 10V/m(80MHz~2.7GHz) Table 9, 9~28V/m(385MHz~5.78GHz)					
			EFT bursts			BS EN/EN61000-4-4			Level 3, 2KV					
			Surge susceptibility			BS EN/EN61000-4-5			Level 3, 2KV/Line-FG ; 1KV/Line-Line					
			Conducted susceptibility			BS EN/EN61000-4-6			Level 3, 10V					
			Magnetic field immunity			BS EN/EN61000-4-8			Level 4, 30A/m					
			Voltage dip, interruption			BS EN/EN61000-4-11			100% dip 1 periods, 30% dip 25 periods, 100% interruptions 250 periods					
OTHERS	MTBF		1719.1K hrs min. Telcordia SR-332 (Bellcore) ; 175.1K hrs min. MIL-HDBK-217F (25℃)											
	DIMENSION		Enclosed type: 130*86*43mm or 5.11"*3.39"*1.69" inch											
	PACKING		0.49Kg; 24pcs/12.8Kg/0.77CUFT											

NOTE

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature.
2. The rated power includes 5Vsb @ 0.8A.
3. The rated power includes 5Vsb @ 0.6A.
4. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 μF & 47 μF parallel capacitor.
5. Tolerance : includes set up tolerance, line regulation and load regulation.
6. Derating may be needed under low input voltages. Please check the derating curve for more details.
7. Touch current was measured from primary input to DC output.
8. The ambient temperature derating of 3.5℃/1000m with fanless models and of 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft).
9. HS1,HS2 & HS3 can not be shorted.
10. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies."
(as available on https://www.meanwell.com//Upload/PDF/EMI_statement_en.pdf)

※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

■ Block Diagram

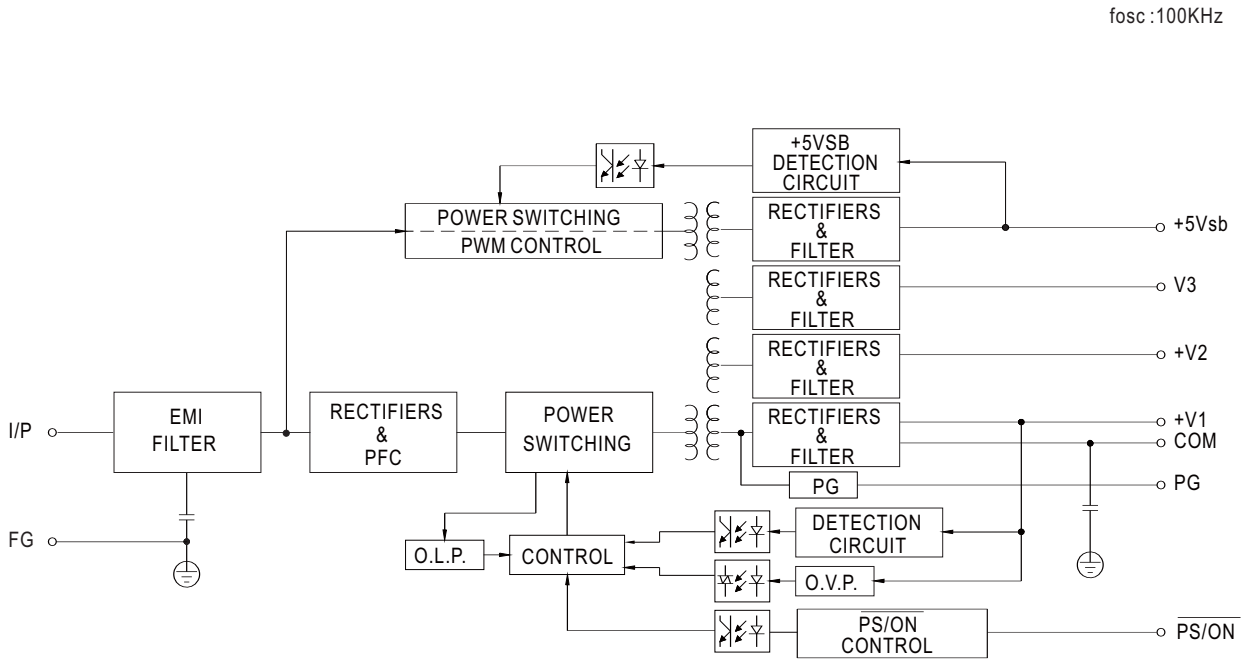

■ Derating Curve

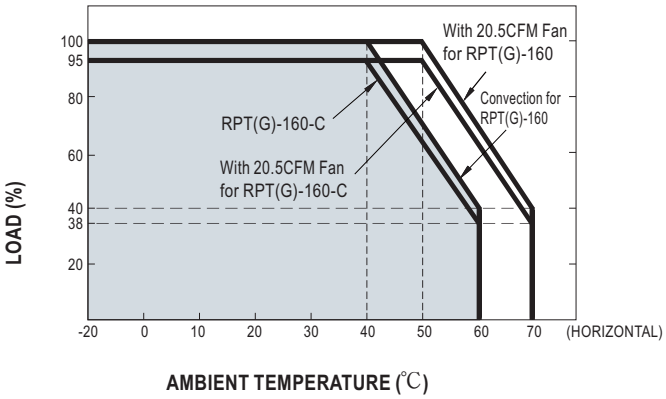

AMBIENT TEMPERATURE (℃)

■ Output Derating VS Input Voltage

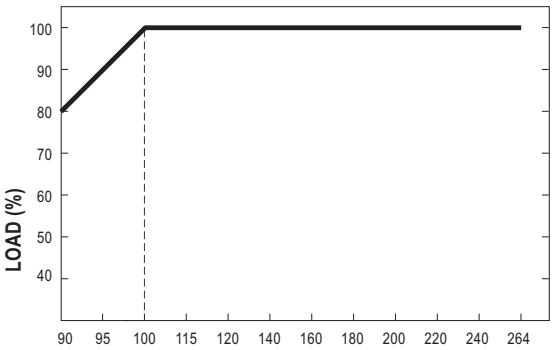

INPUT VOLTAGE (VAC) 60Hz

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

■ Mechanical Specification

Unit:mm

● **PCB Type: RPT-160(G)**

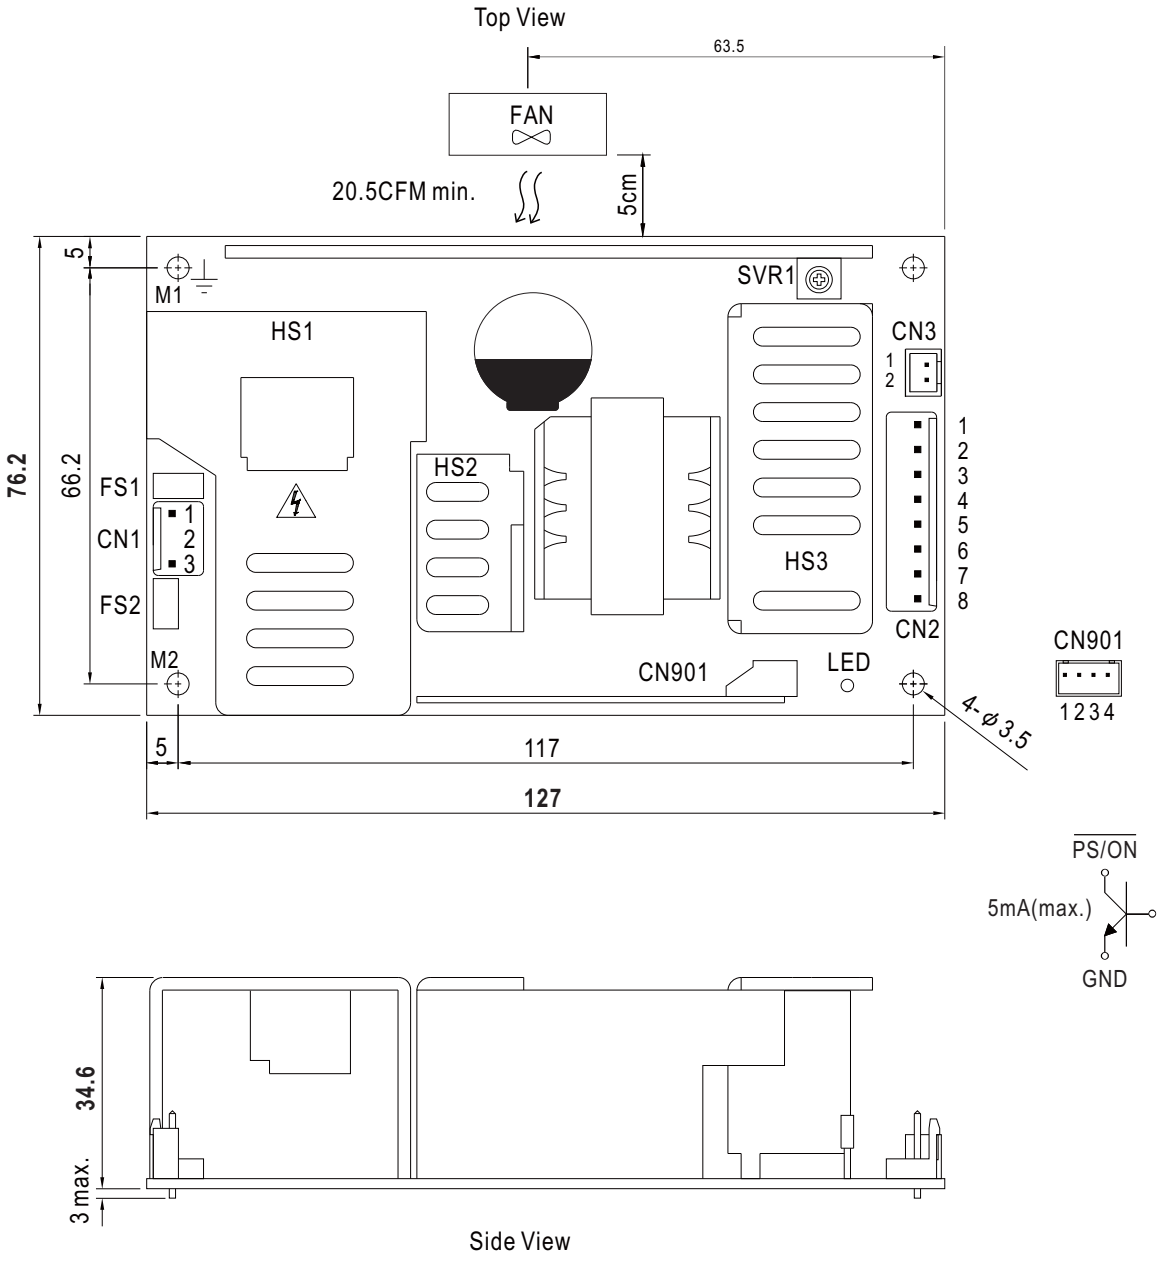

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Enclosed Type: RPT-160(G)-C

Case No.247A Unit:mm

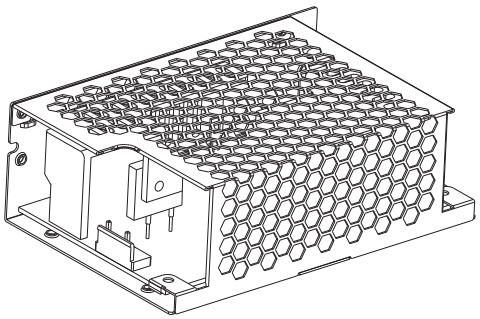

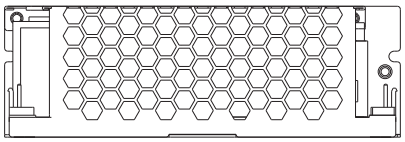

Side View



Side View

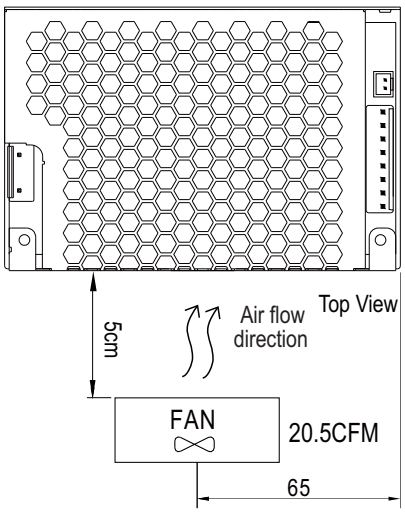



Side View

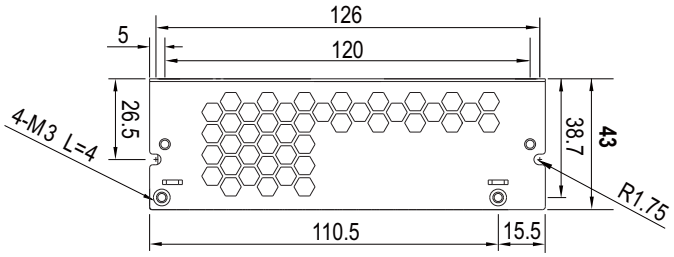

Side View

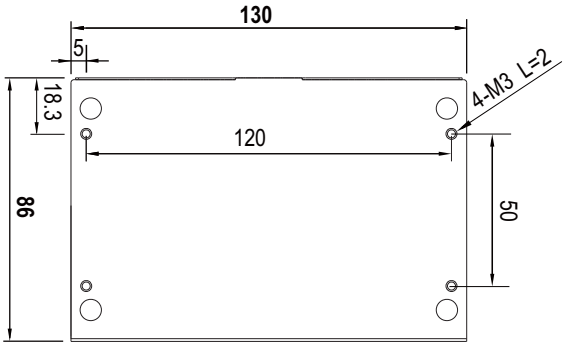

Bottom View

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

※ Mounting Instruction

Hole No.	Recommended Screw Size	MAX. Penetration Depth L	Recommended mounting torque
① ②	M3	2mm	4~6Kgf-cm

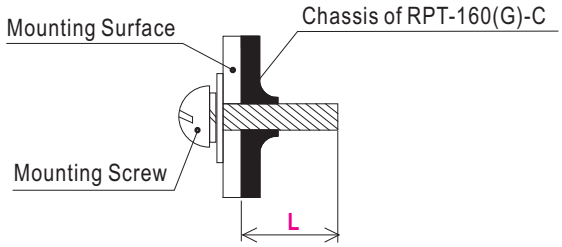

AC Input Connector (CN1) : JST B3P-VH or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1	AC/L	JST VHR or equivalent	JST SVH-21T-P1.1 or equivalent
2	No Pin		
3	AC/N		

DC Output Connector (CN2) : JST B8P-VH or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1,2,3,4	COM	JST VHR or equivalent	JST SVH-21T-P1.1 or equivalent
5,6	CH1		
7	CH2		
8	CH3		

Power Good Connector(CN3):JST B2B-XH or equivalent

Pin No.	Status	Mating Housing	Terminal
1	PG	JST XHP or equivalent	JST SXH-001T-P0.6 or equivalent
2	GND		

5VSB Connector(CN901) : JST B-XH or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1	$\overline{PS/ON}$	JST XHP or equivalent	JST SXH-001T or equivalent
2,4	GND		
3	5VSB		

⚠ 1.HS1,HS2,HS3 can not be shorted
2.M1 and M2 are Safety ground and should all be grounded.

※ Note: 1. The PCB type (Blank Type) model delivers EMI Class B for both conducted emission and radiated emission for the power supply, when configured into either Class I (with FG).

2. The enclosed type (-C type) model is not suitable for configuration within a Class II (no FG) system, but suggested within a Class I (with FG) system.

3. Mounting Instruction for Enclosed type only.

■ INSTALLATION MANUAL

Please refer to : http://www.meanwell.com/manual.html

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000